



## Ditch Bank Flail Mowers



Available in working widths of 47 inches, 60 inches, and 75 inches  
The hydraulic system enables you to use the tool behind the tractor or alongside the tractor.


Used for ditch banks and hill sides

Standard Features Include:

- External drive belt adjustment
- Gearbox with integrated free wheel
- Counter Knives system inside the shredding chamber
- Side parallelogram hydraulic shift
- Adjustable Working Height (Roller)
- Frontal protection against accidental ejection of objects
- Double Parking Stand
- Side Skids
- Constant Velocity PTO shaft
- Tilt 90° up and 65° down



Model	MA120	MLE160	MPE-200
Working Width (Inches)	47	60	75
Required Horsepower	30	37-50	70-80
Weight (LBS)	551	1014	1443
Hitch	Cat I/II	Cat I/II	Cat II/III
Number of Hammers	20	22	24
Rotor Diameter (Inches)	4	5	5
Swing Diameter (Inches)	11	17	17
PTO Series	4	6	6
Rear Roller Diameter (Inches)	5	6	8
Rotor Speed (RPM)	2025	2160	2025
Maximum Offset (Inches)	72	88	116

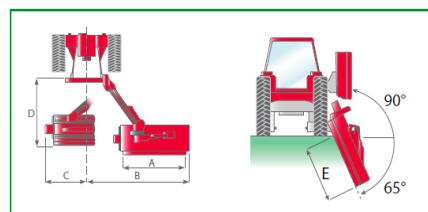

Model	MA120	MLE160	MPE-200
A	47"	60"	75"
B	72"	88"	116"
C	22"	22"	31"
D	57"	68"	73"
E	28"	49"	71"

\* Uniform reserves the right to change specifications without notice.



For more information contact:

Uniform Machinery Corporation PO Box 38 (27894) 4608 Lely Road, Wilson, NC 27893

Phone: 252-291-3997 Fax: 252-291-7354 Toll Free: 877-294-3997

Email: sales@unifarm.biz Website: www.unifarmmachinery.com